

ACTIONPOWER

High Performance DC Power Supply

Cortex DC Series

0V to 2000V, 15kW to 3MW



Programmable Bidirectional DC Power Supply  **RoHS**
compliant

actionpowertest.com

FAST SLEW RATE WITH EXCEPTIONAL RISE/FALL TIME FOR SPEED-CRITICAL APPLICATION

The bi-directional power supply with the best performance, which provides 0.02%F.S. of voltage and current accuracy and 600 μ s of response time based on the unique topology.

600 μ s
**ULTRA FAST
RESPONSE
TIME**

3U



HIGH ACCURACY VOLTAGE & CURRENT

It performs fast dynamic characteristics by stable and precise control using equipped high accuracy voltage and current measurement device and micro-processor for digital signal.

0.02%F.S.
**HIGH
ACCURACY**

0V


**SUPPORT
ZERO VOLT
INPUT**

2000V

**MAXIMUM
DC VOLTAGE
OUTPUT**

HIGH VOLTAGE DC POWER SUPPLY

Cortex DC series provides the safety feature that it stably maintains 0V in standby mode, and the maximum voltage range is up to 2000Vdc.

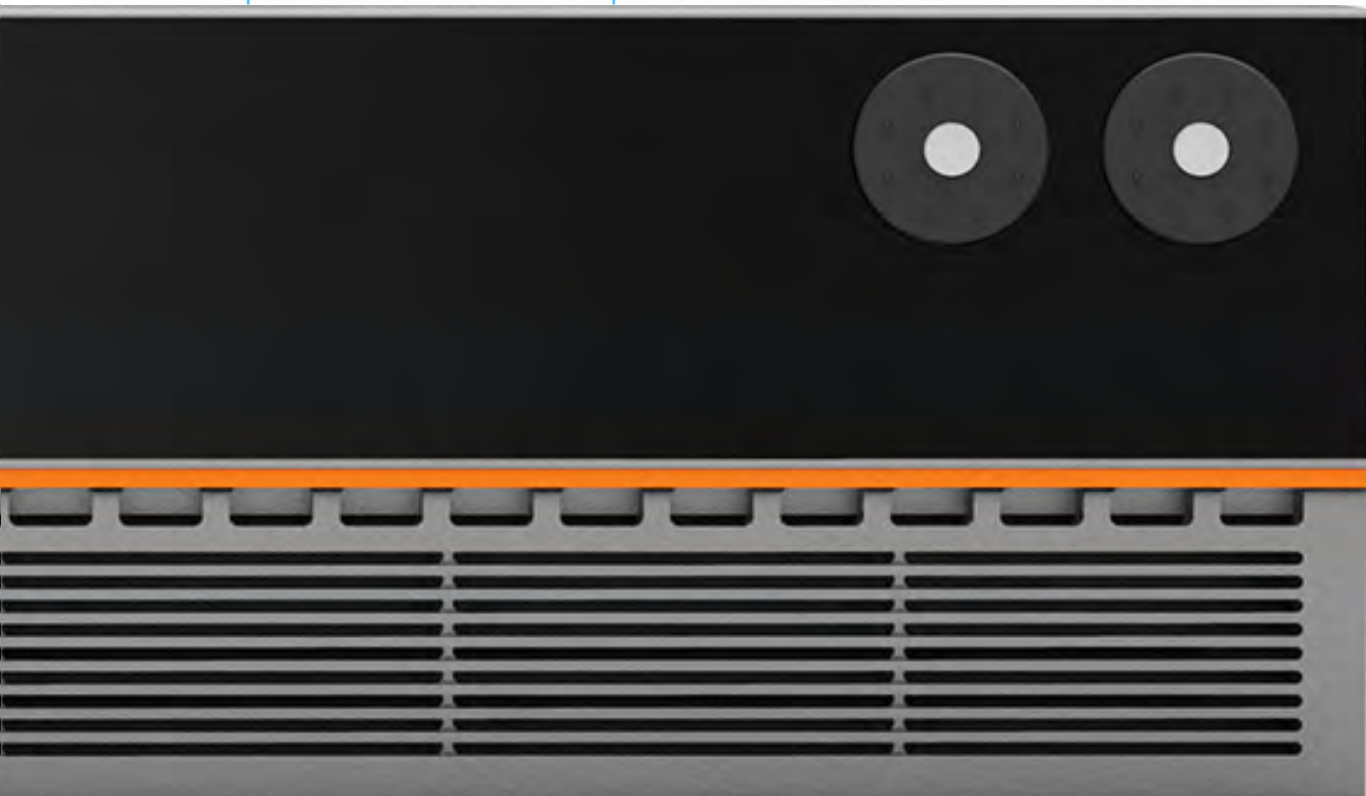

3MW

**MAXIMUM
DC OUTPUT
POWER**

**30kW/3U
HIGH
DENSITY
POWER**

HIGH POWER DENSITY WITH AUTO RANGING

Power density of Cortex DC series is up to 30kW/3U, and it can perform numerous application test using auto-ranging function, which adjusts the voltage and current range, flexibly.

Ratings, types and voltages

Power	Model	Voltage	Current
15kW	CD15-040B	40	±667
	CD15-060B	60	±667
	CD15-080B	80	±667
	CD15-800B	800	±54
	CD15-1K0B	1000	±54
	CD15-1K5B	1500	±45
	CD15-2K0B	2000	±45

Power	Model	Voltage	Current
20kW	CD20-040B	40	±667
	CD20-060B	60	±667
	CD20-080B	80	±667
	CD20-800B	800	±80
	CD20-1K0B	1000	±80
	CD20-1K5B	1500	±60
	CD20-2K0B	2000	±60

Power	Model	Voltage	Current
30kW	CD30-800B	800	±80
	CD30-1K0B	1000	±80
	CD30-1K5B	1500	±60
	CD30-2K0B	2000	±60

FEATURES

- Fast Response Time : <600μs
- High Voltage Accuracy : <0.02%F.S.
- High Current Accuracy : <0.02%F.S.
- Parallel Connection : up to 3MW
- Electric Load Function
- High Power Density : 30kW/3U
- Battery Simulation Function
- PV Simulation Function

Technical data


Model	40V/60V/80V		800V/1000V	1500V/2000V
AC Input				
Voltage, Phases	304Vac to 480Vac / 380V±20% , 3ph+PE			
Frequency	47Hz to 63Hz			
Inrush Current	<50A			
Power Factor	0.99			
Efficiency up to	93.5%	94%	95%	
DC Output Voltage				
Accuracy	±0.02% F.S.			
Resolution	±10mV	±50mV	±100mV	
Display Accuracy	±0.02% F.S.			
Line Regulation CV	±0.01% F.S. (208-408V AC±10% input voltage, constant load and constant temperature)			
Load Regulation CV	±0.01% F.S. (0-100% load, constant load and constant temperature)			
Ripple (rms) CV	<25mV	<200mV	<200mV	
Ripple and Noise p-p CV	<300mVpp	<1200mVpp	<2400mVpp	
Remote Compensation	Max.voltage±1V	Max.voltage and 2%F.S.±1V		
Rise Time 10%-90% CV	1ms	800μs		
Voltage Slew Rate	50V/ms	1500V/ms	3000V/ms	
Recovery Time	2.5ms±0.75% F.S.	600μs ±0.75% F.S. (50% -100% or 100% -50/% load)		
Discharge Time	≤20s	≤20s	≤30s	
DC Output Current				
Accuracy	±0.15% F.S.	±0.02% F.S.		
Resolution	±100mA	±10mA		
Display Accuracy	±0.15% F.S.	±0.02% F.S.		
Display Resolution	±10mA	±10mA		
Line Regulation CC	±0.01% F.S. (208-408V AC±10% input voltage, constant load and constant temperature)			
Load Regulation CC	±0.05% F.S. (0-100% load, constant load and constant temperature)			
Rise Time 10%-90% CC	1ms	500μs		

Technical data

Model	40V/60V/80V	800V/1000V	1500V/2000V
DC Output Power			
Accuracy	±30W		
Resolution	±10W	±1W	
Display Accuracy	±30W		
Display Resolution	±10W	±1W	
Resistance			
Range	0.003-100Ω	0.05-100Ω	0.5-3000Ω
Programming Accuracy	1mΩ	0.01Ω	0.1Ω
Programming Resolution	1mΩ	0.01Ω	0.01Ω
Protective Functions			
OVP	Over-voltage protection, adjustable 0 - 110% UNominal (±1% F.S.)		
OCP	Over-current protection, Adjustable 0V- ±110% INominal (±1% F.S.)		
OPP	Over-power protection, range 0V ~ ±110% PNominal (±1% F.S.)		
OTP	Over-temperature protection		
Interface			
Standard Interface: Type-B USB, LAN, CAN, RS485; Optional Interface: GPIB			
Device Configuration			
Parallel Operation	Up to 100 units with energy-matrix bus (3MW)		
Environment Conditions			
Operating Temperature	0 to 50 (°C) (power derating over 35°C)		
Storage Temperature	-20 to 70(°C)		
Humidity	≤ 80% . Not condensing		
Altitude	Output current derating 2%/100m above 2000m or derating 1°C/100m		
Mechanical Spec.			
Cooling	Forced air cooling		
Dimensions	435mm x 132mm x 781mm		
Weight	40kg	35kg	

Modular and Scalable Design


The Cortex DC series applies the DMPS (Digital Matrix Parallel System) method for high performance and stable power supply, which enables capacity expansion up to 3MW by connecting up to 100 units of 30kW power modules in parallel using high-speed fiber optic communication. In particular, redundancy function ensures stable operation of the test system even in the event of fault at specific modules. That is in case of fault in any slave module, the system bypass the abnormal module and operate continuously so that secures the reliability and stability of the system by minimizing down-time.

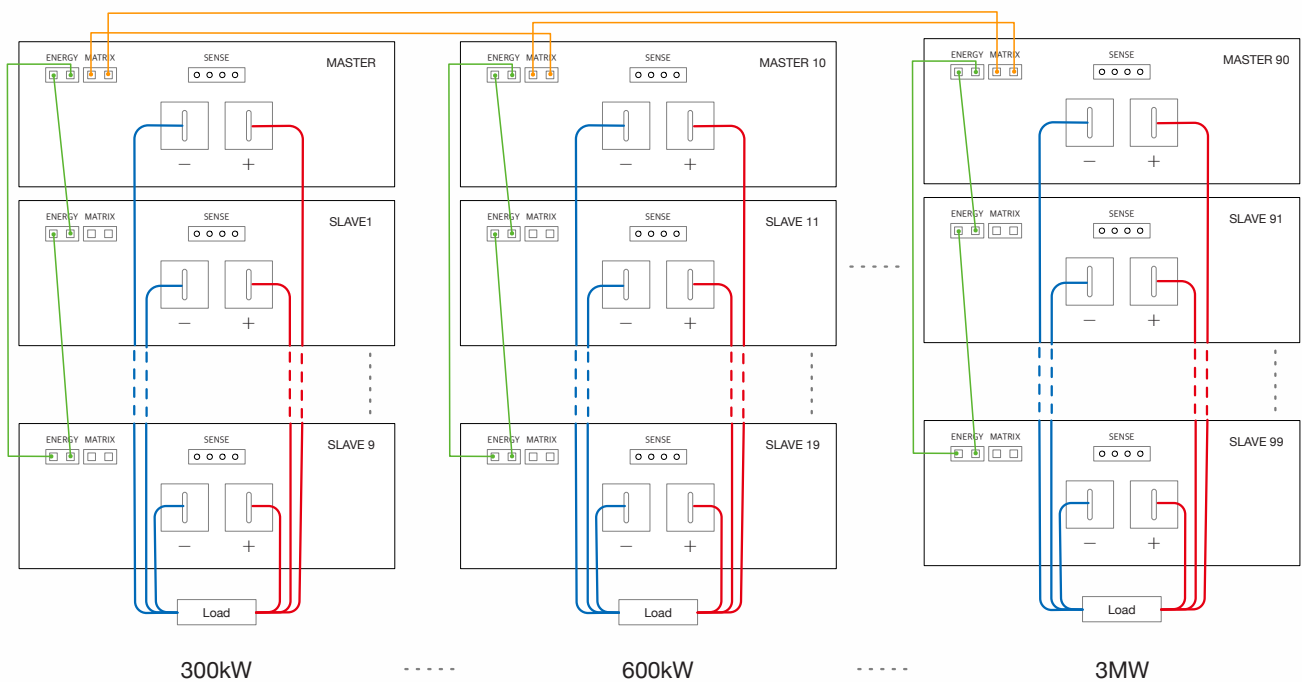


Features

- For 380V, 400V AC
- Modular rack system
- Module redundancy function
- Cabinet system with 26U / 42U & 19 inch rack
- Minimal footprint : 3U / 30kW
- Up to 100 units parallel connection (3MW)
- Extensive protective function (OVP, OCP, OTP, ...)
- Air cooling

Auto ranging




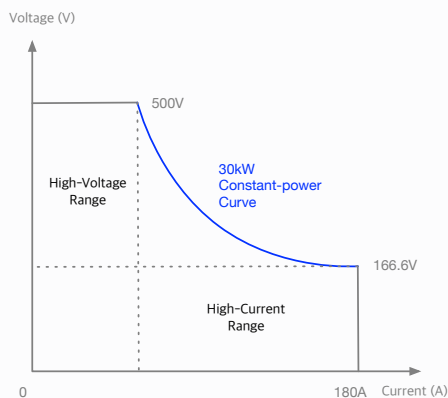


The auto ranging function automatically controls voltage and current through the programmable DC power supply to maintain the rated output over a wide operating range. That is the higher voltage is available at lower current, and vice versa, allowing the DUT to be tested under different voltage/current conditions with a single DC power supply.

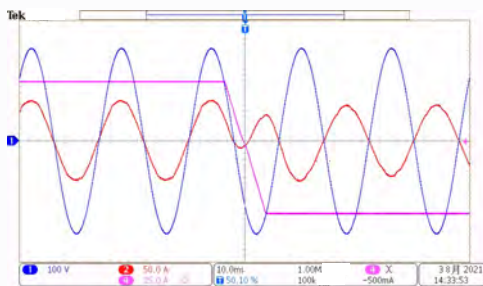

In addition, it supports smooth and ultra-fast automatic switching with the bidirectional Automatic "source" & "load" function. The overshoot of voltage or current can be effectively controlled without any delay in the transition between the two states of source and load.

30kW Cortex DC Series Auto Ranging

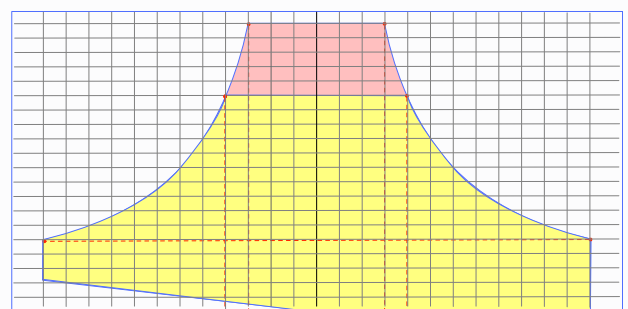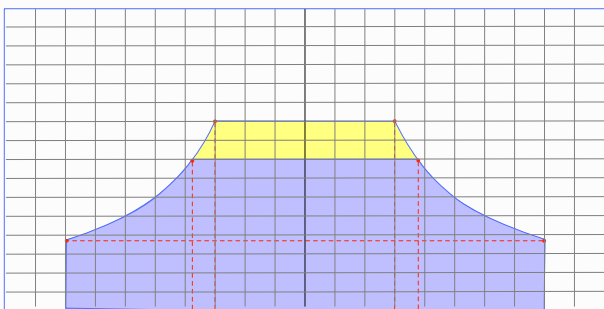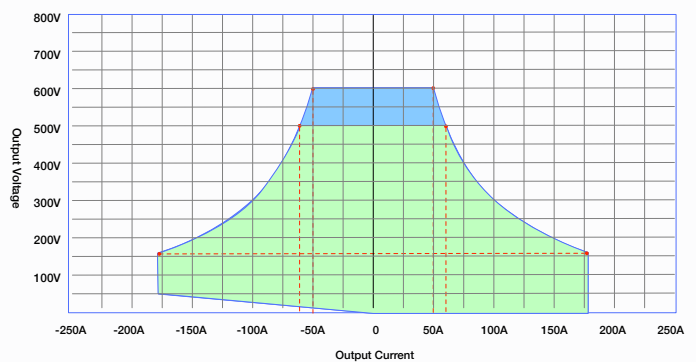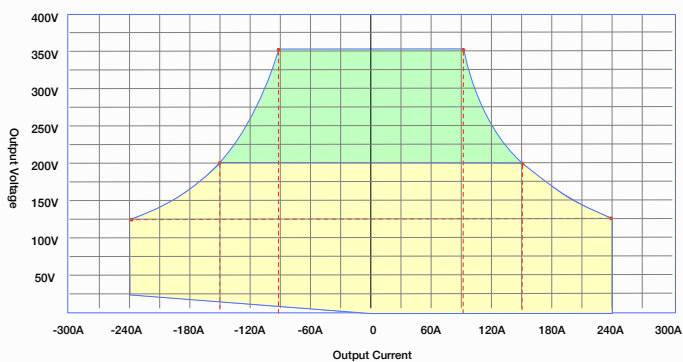

Application

The modular Cortex DC series is an innovative product used in a variety of applications based on the unique technology and optimal performance. It can act as regenerative electronic load while supplying bidirectional DC power, which is applicable to long-term reliability test applications involving a variety of power sources, including electric vehicle DC charging stations, on-board chargers, automotive battery charge and discharge tests, fuel cell discharge tests, ESS charge and discharge tests, and other power sources. They are particularly well suited for applications requiring very fast response times, such as simulating electric vehicle driving patterns.




EV Battery Testing



Solar Array Testing



Fuel Cell Discharge Testing

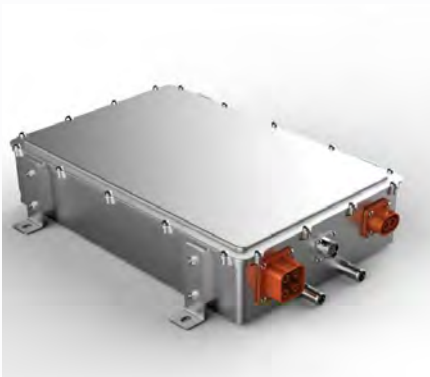

Onboard Charger Stability Testing



DC EVSE Stability Testing



ESS Testing
(Solar Array & Battery Simulator)



Power Electronic Components Testing




Server Power Supply Reliability Testing

Powerful Software




Provides Diverse Simulation Modes


Basic Mode

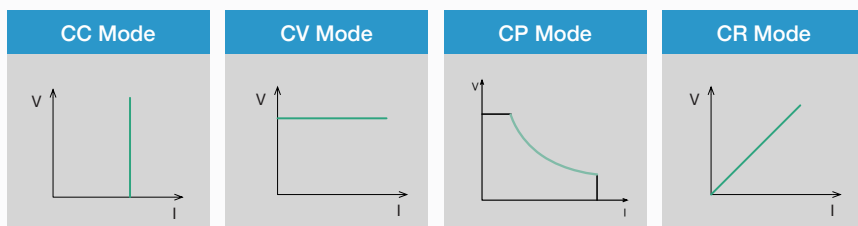

Dynamic Mode

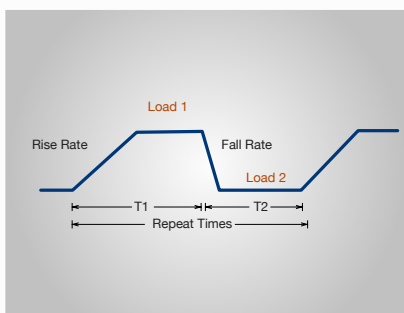


Programmable Sequences

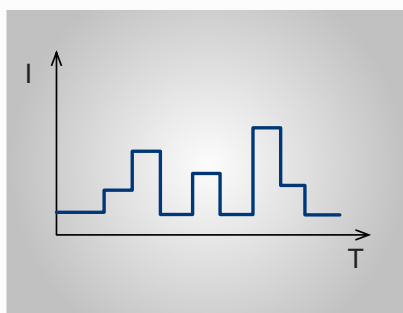


FEATURES

- Battery Simulation
LiMn2O4, LiCoO2, LiFePO4, NiMH, Ternary LI, LiTiO2 and PbO2 batteries
- PV Simulation
Static curves, Curve programming, Static MPPT, Dynamic MPPT, Weather Simulation, Shading of photovoltaic panels
- Programming waveform
- Curve import and export




Panel Description

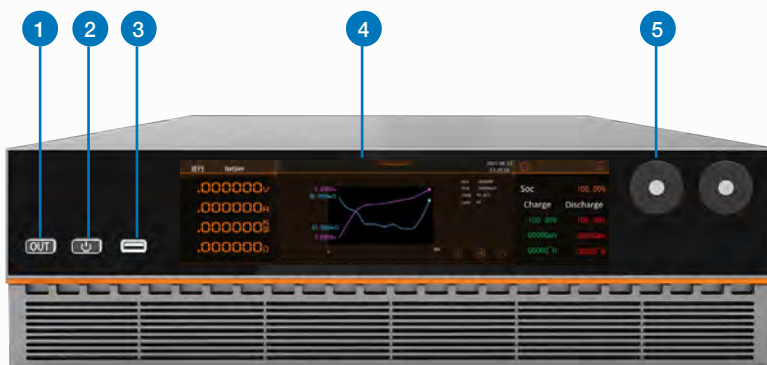

1. Power Output Button
2. Power On / Reset Button
Device on/off switch
3. USB port
External Storage Interface
4. 18" FHD Touch Screen
Display setting and measurement data
5. Pushable Knob
To edit the settings on-screen
6. LAN Interface
7. USB Interface
8. Energy Matrix Interface
Parallel connection
9. Anyport Interface
10. Voltage Sensing
11. Output Positive/Negative Terminals
12. AC input & PE Terminal
13. AC Circuit Breaker
AC power on/off

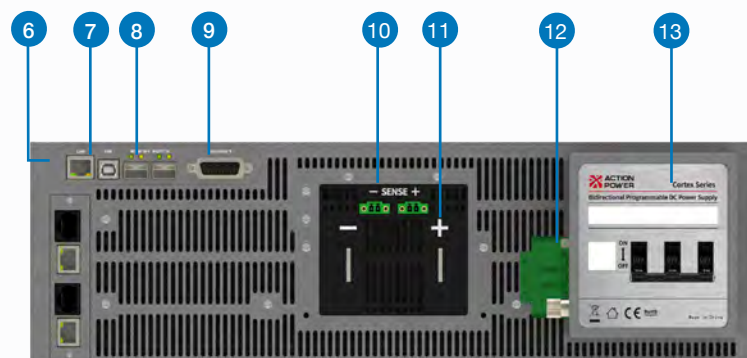

Dimension

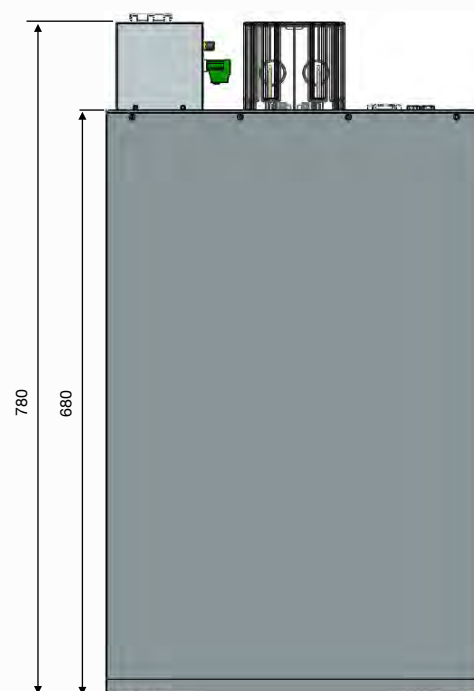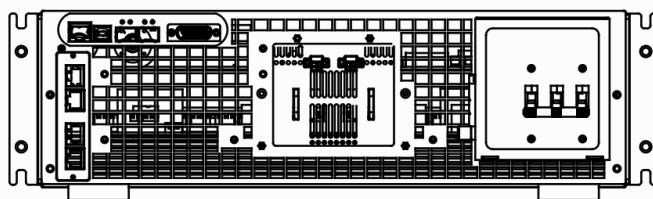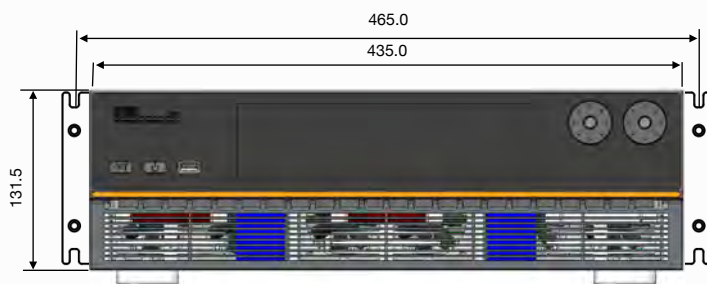


ACTIONPOWER

For more information, please contact
your local ACTIONPOWER distributor or visit
www.actionpowertest.com

© Copyright 2026 ACTIONPOWER. All rights reserved.
Specifications subject to change without notice.

Headquarters

No.3333 Run De RD., Chang An District, Xi'an Shaanxi, China 710117
info@actionpowertest.com
+86 (0)29-8569-1870



Distributor in Germany, Austria and Switzerland

Höcherl und Hackl GmbH
Industriestr. 13 | D-94357 Konzell
+49 9963 94301-0
sales@hoecherl-hackl.com
www.hoecherl-hackl.de



www.hoecherl-hackl.com