

ACTIONPOWER

## High Power DC Source & Load

**Titan DC** series

20V to 1500V, 300kW to 7.5MW



Programmable Bidirectional DC Power Supply

[actionpowertest.com](http://actionpowertest.com)

# HIGH POWER CAPACITY WITH PARALLEL OPERATION

With 300kW - 750kW of unit capacity,  
the total capacity can be expanded up  
to 7.5MW by parallel connections.

**1500V**  
**MAXIMUM**  
**DC OUTPUT**  
**VOLTAGE**

**7.5MW**  
**MAXIMUM**  
**DC OUTPUT**  
**POWER**


**MULTI-  
OUTPUT  
MODE**

Multiple DC power supply cabinets can individually operate in single mode to configure multi-channel output, or in Master/Slave mode to configure single-channel output with combined capacity.



# SIMULATION FUNCTION WITH HIGH PERFORMANCE

Titan DC series provide real-time battery and PV simulation function with fast response time of less than 1 ms.

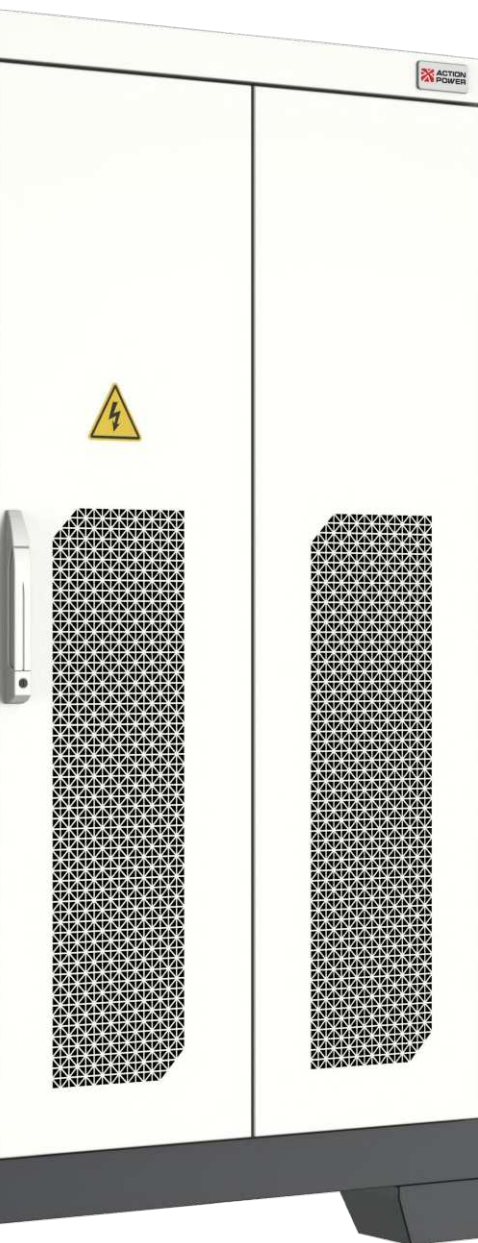

**BATTERY  
SIMULATION**

**PV  
SIMULATION**

**ELEC-  
TRONIC  
LOAD**


Titan DC series provide grid-regenerative DC electronic load function, which is applicable for testing fuel cell stack or fuel cell engine system, etc.



# Ratings, types and voltages

| Model        | Power [kW] | Output Voltage [V] | Output Current [A] | Size (WHD) [mm] | Weight [kg] |
|--------------|------------|--------------------|--------------------|-----------------|-------------|
| TD300-1k5-04 | ±300       | 12-1500            | ±400               | 2010x1955x1200  | 2,850       |
| TD400-1k5-06 | ±400       | 12-1500            | ±600               | 2010x1955x1200  | 2,850       |
| TD500-1k5-07 | ±500       | 12-1500            | ±700               | 2010x1955x1200  | 2,850       |
| TD600-1k5-08 | ±600       | 12-1500            | ±800               | 3410x1955x1200  | 5,080       |
| TD750-1k5-10 | ±750       | 12-1500            | ±1000              | 3410x1955x1200  | 5,080       |

Titan DC series 300 kW

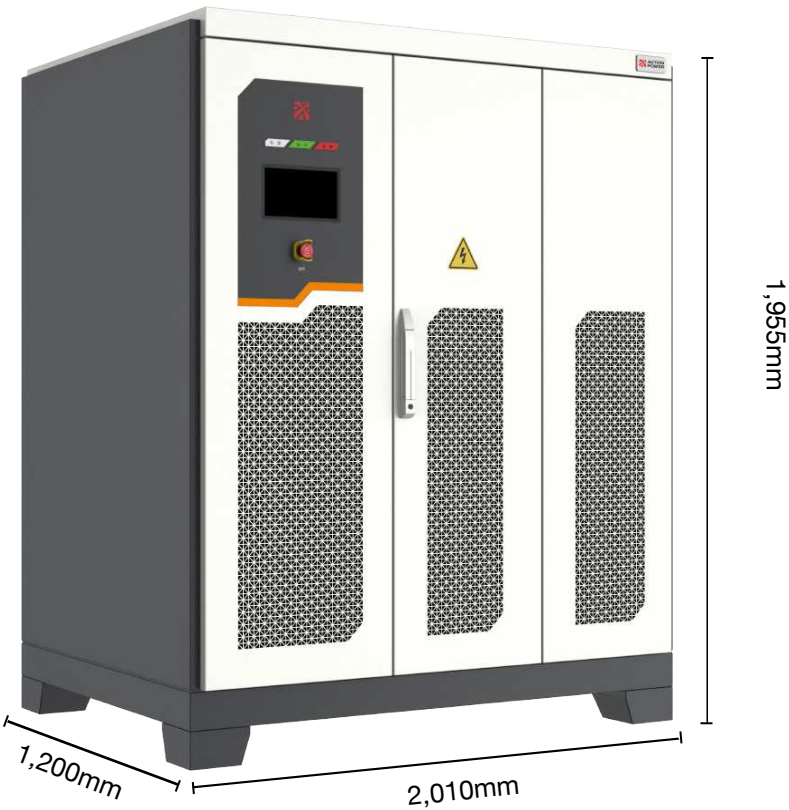

# Technical data


| Titans DC series     |                                                                               | Specification |
|----------------------|-------------------------------------------------------------------------------|---------------|
| AC Input             |                                                                               |               |
| Voltage, Phases      | 400V±10%                                                                      |               |
| Frequency            | 47Hz to 63Hz                                                                  |               |
| Power factor         | 0.99 @ full load                                                              |               |
| Efficiency           | Model of 300kW and above : >94%, others: >90%                                 |               |
| Harmonic current     | ≤3%                                                                           |               |
| DC Output Voltage    |                                                                               |               |
| Accuracy             | ±0.1% F.S.                                                                    |               |
| Resolution           | 0.01V                                                                         |               |
| Ripple(RMS)          | 0.1% F.S. (resistive load)                                                    |               |
| Slew rate            | 300V/ms                                                                       |               |
| DC Output Current    |                                                                               |               |
| Accuracy             | ±0.1% F.S.                                                                    |               |
| Resolution           | 0.01A                                                                         |               |
| Ripple(RMS)          | 0.1% F.S. (resistive load)                                                    |               |
| Slew rate            | 500A/ms                                                                       |               |
| Rise time            | ≤2ms (10%~90% rated current)                                                  |               |
| Switching time       | ≤4ms (switching from -09% to +90%)                                            |               |
| Measurement          |                                                                               |               |
| Voltage accuracy     | ±0.1% F.S.                                                                    |               |
| Voltage resolution   | 0.001V                                                                        |               |
| Current accuracy     | ±0.1% F.S.                                                                    |               |
| Current resolution   | 0.001A                                                                        |               |
| Power accuracy       | ±0.2% F.S.                                                                    |               |
| Power resolution     | 0.001W                                                                        |               |
| Protective Functions |                                                                               |               |
| OVP                  | Over-voltage protection, adjustable 0 - 110% U <sub>Nominal</sub> (±1% F.S.)  |               |
| OCP                  | Over-current protection, Adjustable 0V- ±110% I <sub>Nominal</sub> (±1% F.S.) |               |
| OPP                  | Over-power protection, range 0V ~ ±110% P <sub>Nominal</sub> (±1% F.S.)       |               |
| OT                   | Overt-temperature protection                                                  |               |

# Technical data


| Titan DC series                                           |                                                                                                                                                                                                                                                                                                                     | Specification |
|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Battery Simulation                                        |                                                                                                                                                                                                                                                                                                                     |               |
| Battery type                                              | Capable of simulating various battery types, including Lithium manganese oxide, Lithium cobalt oxide, Lithium iron phosphate, Nickel-metal hydride, Ternary lithium, Lithium titanate, and Lead-acid batteries.<br>Supports user-defined battery types and open first-, second-, and third-order RC battery models. |               |
| Parameter                                                 | Number of batteries in series connection, number of batteries in parallel connection, initial SOC, initial temperature, internal resistance, cell capacity and other parameters                                                                                                                                     |               |
| Interface                                                 | Import of CSV user-defined model is supported                                                                                                                                                                                                                                                                       |               |
| Real-time performance                                     | 1ms command refresh rate                                                                                                                                                                                                                                                                                            |               |
| Interface                                                 |                                                                                                                                                                                                                                                                                                                     |               |
| Control Mode, LAN, LAN Whitelist, RS485, CAN, and SYSPORT |                                                                                                                                                                                                                                                                                                                     |               |
| Device Configuration                                      |                                                                                                                                                                                                                                                                                                                     |               |
| Parallel operation                                        | Up to 7.5MW                                                                                                                                                                                                                                                                                                         |               |
| Insulation and Withstanding Voltage                       |                                                                                                                                                                                                                                                                                                                     |               |
| 20MΩ/DC500V; 5000VDC/1min                                 |                                                                                                                                                                                                                                                                                                                     |               |
| Environmental Conditions                                  |                                                                                                                                                                                                                                                                                                                     |               |
| Operating temperature                                     | -10 to 40°C                                                                                                                                                                                                                                                                                                         |               |
| Relative humidity                                         | 10 to 90% RAH                                                                                                                                                                                                                                                                                                       |               |
| Altitude                                                  | ≤2000m without derating, Above 2000m please contact ACTIONPOWER                                                                                                                                                                                                                                                     |               |
| Cooling Method                                            |                                                                                                                                                                                                                                                                                                                     |               |
| Air-cooled                                                | Dry clean air                                                                                                                                                                                                                                                                                                       |               |

# High Power Scalable Design


Titan DC series supports multi-unit parallel operation and adopts high-speed fiber optic communication technology, featuring strong anti-interference capability and zero latency. The system supports expansion up to 7.5MW by connecting in parallel in 1MW increments from 300kW minimum. It enables multi-position, high-capacity, and multi-voltage level test setups, significantly improving testing efficiency for customers. In particular, the parallel-connected panels can be used in multi-output mode by separating the outputs according to the user's needs, allowing multiple test equipment to be tested at the same time, maximizing user convenience and saving a lot of costs.

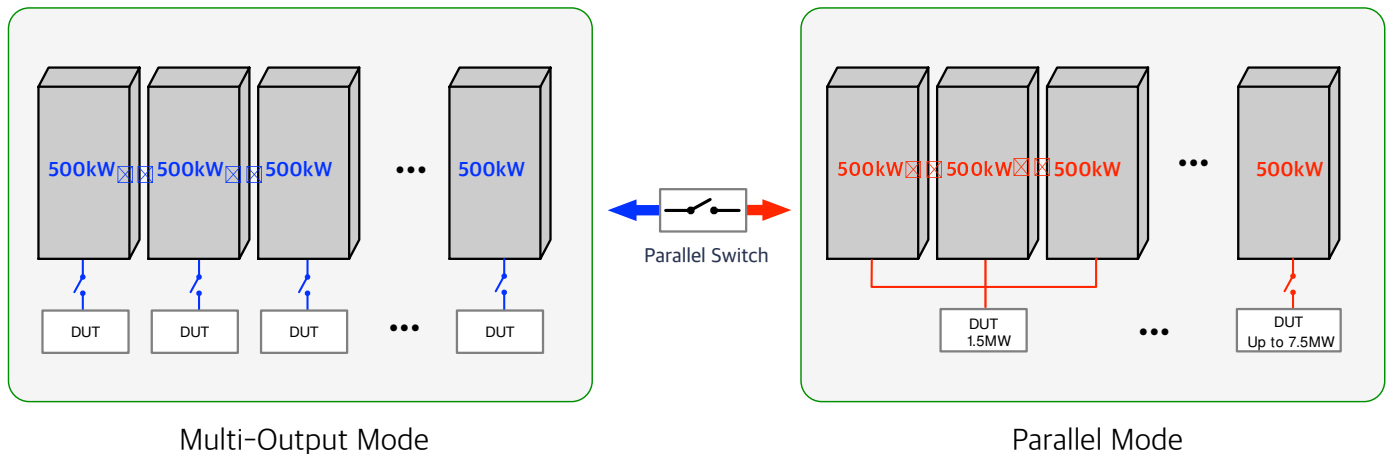

# Auto Ranging

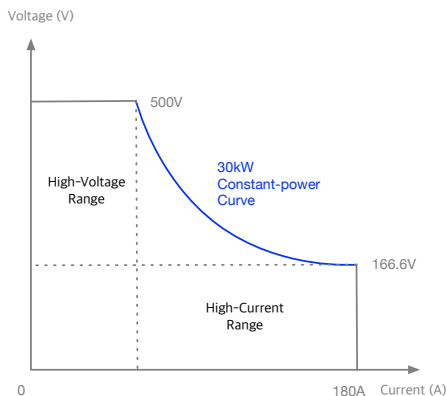

The auto ranging function automatically controls voltage and current through the programmable DC power supply to maintain the rated output over a wide operating range. That is the higher voltage is available at lower current, and vice versa, allowing the DUT to be tested under different voltage/current conditions with a single DC power supply.

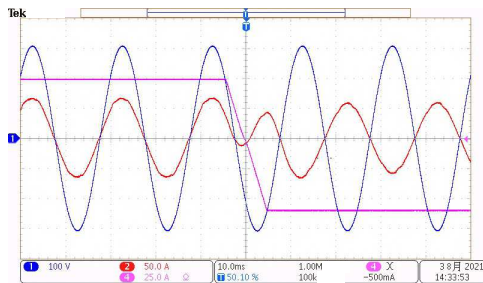

In addition, it supports smooth and ultra-fast automatic switching with the bidirectional Automatic “source” & “load” function. The overshoot of voltage or current can be effectively controlled without any delay in the transition between the two states of source and load.

# CV/CC Priority Setting Function

CV (constant voltage) priority / CC (constant current) priority mode can be selected and set.

## Suppression of Overshoot with CC Priority Mode

With the Titan DC series power supply, the CC priority mode can effectively respond to load variations. This mode suppresses momentary current spikes when the load suddenly changes its resistance, thus ensuring stable protection for sensitive loads.

Configuring the power supply in CC priority mode allows for voltage adjustment according to load changes, maintaining a stable current. This effectively protects sensitive loads such as high-power laser diodes and minimizes the risk of damage due to overshoot.


## Current Overshoot in CV Priority Mode

In CV priority mode, the power supply prioritizes maintaining a constant output voltage. However, sudden load variations can cause momentary current spikes, posing a risk of damage to sensitive loads.

Therefore, configuring the Titan DC series power supply in CC priority mode enhances load stability and prevents damage caused by overshoot.

# Application

ActionPower's high-capacity bi-directional DC power supplies are innovative products that are used in a variety of applications based on unique technology and optimal performance. ActionPower products can act as regenerative electronic load while providing bi-directional DC power, which is applicable of long-term reliability test applications such as electric vehicle DC charging stations, automotive battery charge and discharge tests, fuel cell discharge tests, ESS charge and discharge tests, and other applications requiring very fast response time, such as simulating electric vehicle driving patterns.

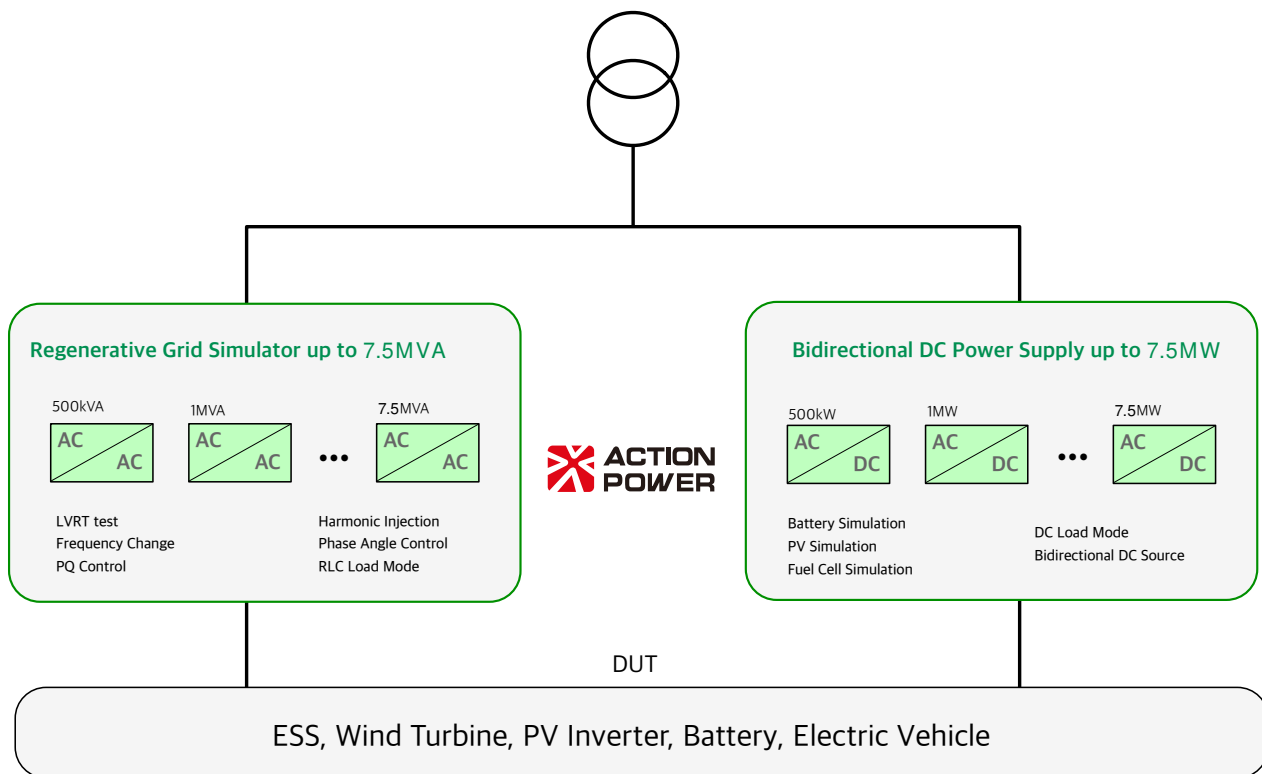


# Powerful Software




## Provides Diverse Simulation Modes


### Basic Mode

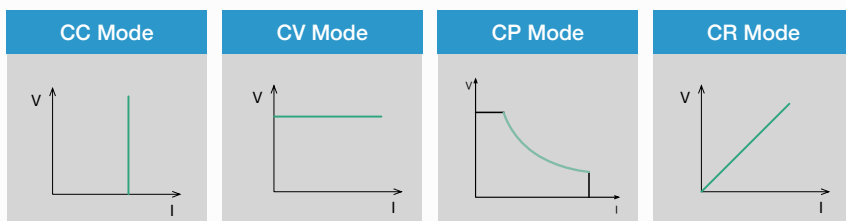

### Dynamic Mode

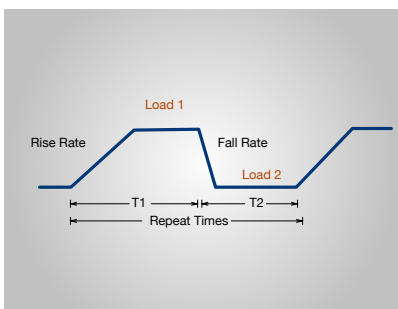

### Programmable Sequences

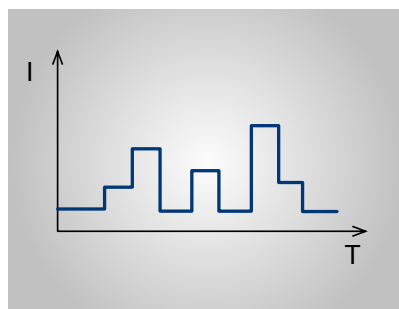


## KEY FEATURES

- **Battery Simulation**  
LiMn2O4, LiCoO2, LiFePO4, NiMH, Ternary LI, LiTiO2 and PbO2 batteries
- **PV Simulation**  
Static curves, Curve programming, Static MPPT, Dynamic MPPT, Weather Simulation, Shading of photovoltaic panels
- **Electronic Load Function**
- **Programming Waveform**

# Comprehensive Battery Simulation

It can simulate the output and charge/discharge characteristics of various battery packs such as lithium manganese, lithium cobalt, lithium iron phosphate, nickel-hydrogen, ternary lithium, lithium titanate and lead-acid batteries, and can set the parameters such as serial/parallel quantity, temperature, SOC, internal resistance and single battery capacity to simulate the output characteristics of the whole battery pack. The power supply opens first, second and third-order RC battery models and supports user-defined battery parameters and import of CSV user-defined model.

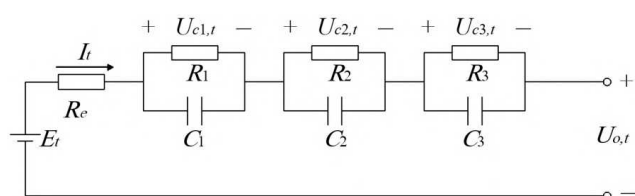


RCR Equivalent Circuit Model

|                          |                                            |
|--------------------------|--------------------------------------------|
| Architecture             | 400 V                                      |
| Nominal battery capacity | 33.2 kWh                                   |
| Usable battery capacity  | 27.2 kWh                                   |
| Pack layout              | 96s1p (8 serially connected 12s1p modules) |
| Number of Li-ion cells   | 96                                         |
| Rated cell voltage       | 3.7 V                                      |
| Capacity per cell        | 94 Ah                                      |
| Cell chemistry           | NCM333                                     |


User-defined battery parameters

One battery cell format




Different cell chemistries


Lithium-Iron-Phosphate





Lithium-Nickel-Cobalt



Lithium-Nickel-Mangante



Modular platform -> scalable to configure batteries for various pack

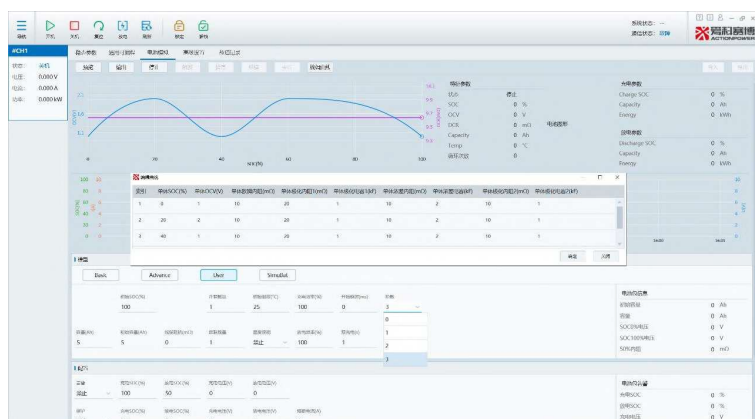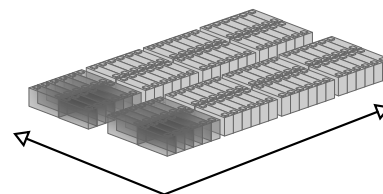

Battery Simulation Interface

## KEY FEATURES

- DC Output Voltage : 20-2000Vdc
- Parallel Connection : up to 7.5MW
- Battery Simulation  
LiMn204, LiCoO2, LiFePO4, NiMH, Ternary LI, LiTiO2 and PbO2
- High Dynamic : <2ms (10~90%)
- Voltage Slew Rate : 300V/ms
- ESS, UPS, EVE, etc. testing

# PV Simulation

Titan DC series is a DC power supply featuring high precision, high dynamics and high-speed switching. With the complete I-V curve simulation function, it can simulate the output characteristics of various VP panels, and provide various kinds of user- defined curves, static and dynamic I-V curves and shadow occlusion simulations. The programming function can simulate different waveform outputs through three programming modes like Step, List and Wave, in order to fulfill the test requirements of various industries. The power supply can not only provide standard power supply environment for electrical equipment, but also receive the energy from load and feed ti back to the grid, with feedback efficiency of above 94%, to save energy and improve the test environment.




Static MPPT Interface




Dynamic MPPT Interface



Curve Programming Interface

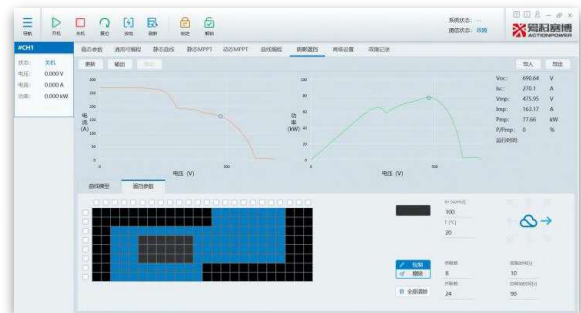

Shadow I-V Interface

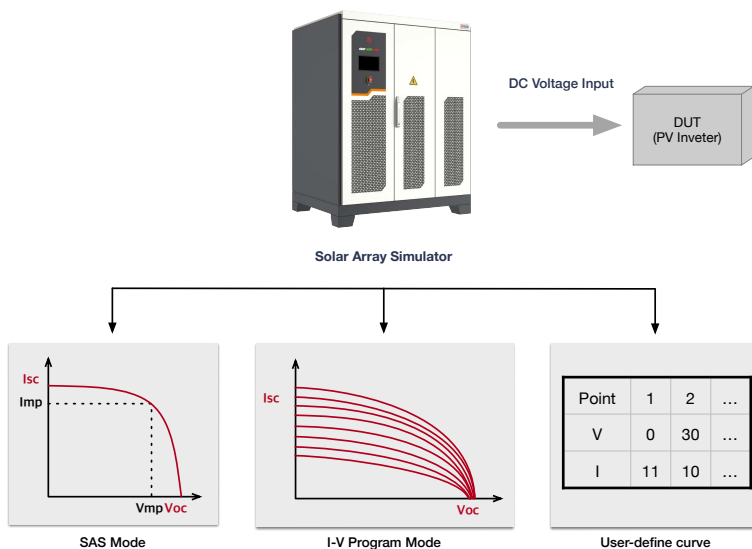


## KEY FEATURES

- DC Output Voltage : 20-2000Vdc
- Parallel Connection : up to 7.5MW
- Complete I-V Curve Simulation
- High Dynamics : <2ms (10~90%)
- Voltage Slew Rate : 300V/ms
- Shadow I-V curve simulation
- Built-in dynamic MPPT test profile  
Sandia, EN50530

# Electronic Load

Titan DC series feedback DC electronic load is different from the traditional consumption load. It feeds back the absorbed electric energy to the power grid after transformation to save energy and improve the test environment. The product adopts full digital control technology, and has characteristics such as step-less adjustment, high accuracy, high dynamic performance and high reliability. It meets the requirements of low voltage and high current test, and can be applied to test scenarios such as fuel cell stack and fuel cell engine system.

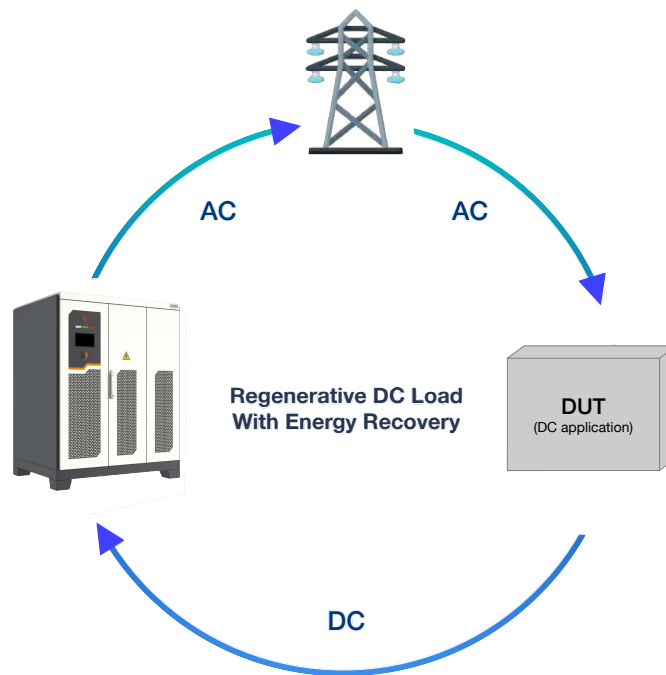

Titan DC series is regenerative DC electronic loads capable of absorbing current and efficiently feeding it back into the power grid. The series achieves an impressive efficiency of up to 94%. The returned electrical energy can be reused by other equipment within the facility, resulting in savings in overall energy consumption and carbon emissions, reducing the environmental impact.

## KEY FEATURES

- DC Output Voltage : 20-2000Vdc
- High Dynamics : <2ms (10~90%)
- Output slow start
- Low Harmonic Current: <3% F.S.
- Anti-revers function
- Online insulation impedance monitoring
- Discharging resistor
- Capacitance compensation

## **ACTIONPOWER**

For more information, please contact  
your local ACTIONPOWER distributor or visit

[\*\*www.actionpowertest.com\*\*](http://www.actionpowertest.com)

© Copyright 2026 ACTIONPOWER. All rights reserved.  
Specifications subject to change without notice.

### **Headquarters**

No.3333 Run De RD., Chang An District, Xi'an Shaanxi, China 710 119

[\*\*info@actionpowertest.com\*\*](mailto:info@actionpowertest.com)

**+86 (0)29-8569-1870**